







BAR - Flight

T - Flight

U - Flight

OO - Flight



Chain NO.	Pitch	Pin Diameter	Other Dimensions					Ultimate Tensile Strength	
	P	D	C	T	F	R	S	Q (20MnCr5)	Q (42CrMo4)
10160	4"	0.55"	1.42"	0.94"	0.39"	0.235"	0.35"	24700lbs	47200lbs
	101.6mm	14mm	36mm	24mm	10mm	6mm	9mm	110KN	210KN
10160R	4"	0.55"	1.42"	1.18"	0.53"	0.315"	0.51"	40500lbs	74200lbs
	101.6mm	14mm	36mm	30mm	13.5mm	8mm	13mm	180KN	330KN
12514	4.92"	0.63"	1.42"	1.18"	0.63"	0.39"	0.59"	36600lbs	65200lbs
	125mm	16mm	36mm	30mm	16mm	10mm	15mm	163KN	290KN
14218	5.59"	0.98"	1.97"	1.65"	0.81"	0.47"	0.75"	65200lbs	123700lbs
	142mm	25mm	50mm	42mm	20.5mm	12mm	19mm	290KN	550KN
14226	5.59"	0.98"	1.97"	2.44"	1.18"	0.63"	1.12"	99000lbs	177700lbs
	142mm	25mm	50mm	62mm	30mm	16mm	28.5mm	440KN	790KN
16025	6.30"	0.98"	1.97"	1.97"	1.63"	0.55"	0.98"	83200lbs	147300lbs
	160mm	25mm	50mm	50mm	27mm	14mm	25mm	370KN	655KN
20028	7.87"	1.18"	2.36"	2.60"	1.22"	0.79"	1.18"	112500lbs	202500lbs
	200mm	30mm	60mm	66mm	31mm	20mm	30mm	500KN	900KN

NOTE: Please consult with Camel Convey for requirements for not listed above.


Email: sales@camelconvey.com
www.camelconvey.com



Single Link

Double Link

Triple Link

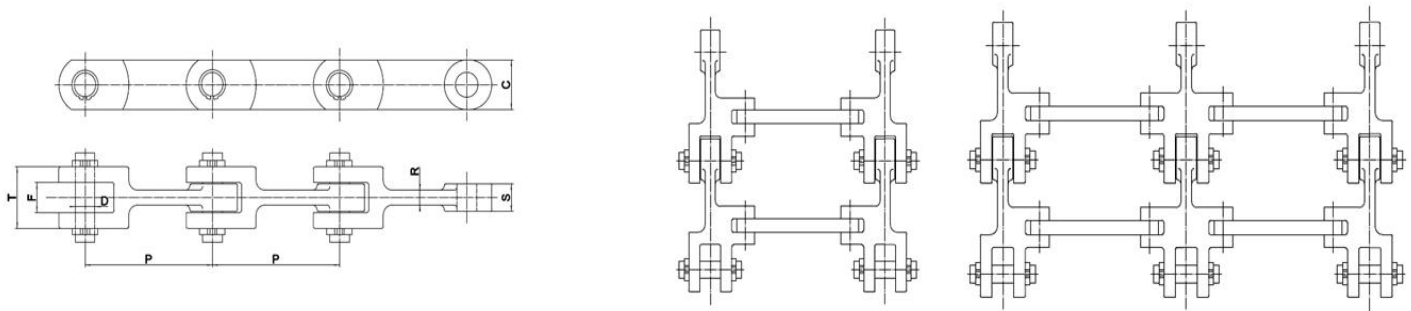

Chain NO.	Pitch	Pin Diameter	Other Dimensions					Ultimate Tensile Strength	
	P	D	C	T	F	R	S	Q (20MnCr5)	Q (42CrMo4)
10160	4"	0.55"	1.42"	0.94"	0.39"	0.235"	0.35"	24700lbs	47200lbs
	101.6mm	14mm	36mm	24mm	10mm	6mm	9mm	110KN	210KN
10160R	4"	0.55"	1.42"	1.18"	0.53"	0.315"	0.51"	40500lbs	74200lbs
	101.6mm	14mm	36mm	30mm	13.5mm	8mm	13mm	180KN	330KN
12514	4.92"	0.63"	1.42"	1.18"	0.63"	0.39"	0.59"	36600lbs	65200lbs
	125mm	16mm	36mm	30mm	16mm	10mm	15mm	163KN	290KN
14218	5.59"	0.98"	1.97"	1.65"	0.81"	0.47"	0.75"	65200lbs	123700lbs
	142mm	25mm	50mm	42mm	20.5mm	12mm	19mm	290KN	550KN
14226	5.59"	0.98"	1.97"	2.44"	1.18"	0.63"	1.12"	99000lbs	177700lbs
	142mm	25mm	50mm	62mm	30mm	16mm	28.5mm	440KN	790KN
16025	6.30"	0.98"	1.97"	1.97"	1.63"	0.55"	0.98"	83200lbs	147300lbs
	160mm	25mm	50mm	50mm	27mm	14mm	25mm	370KN	655KN
20028	7.87"	1.18"	2.36"	2.60"	1.22"	0.79"	1.18"	112500lbs	202500lbs
	200mm	30mm	60mm	66mm	31mm	20mm	30mm	500KN	900KN

NOTE: Please consult with Camel Convey for requirements for not listed above.

Email:sales@camelconvey.com
www.camelconvey.com